

DATA SHEET:



# D5.1/2.N

Type 'D' Stopping Plugs are used to seal unused cable gland or conduit entries in Ex approved enclosures, maintaining the hazardous location certification and the overall integrity of the installation.



Type D5  
NPT Taper

3.0mm +1mm/-0mm (0.118")

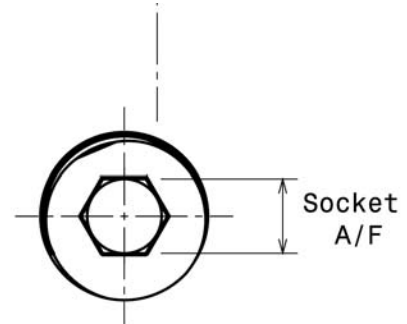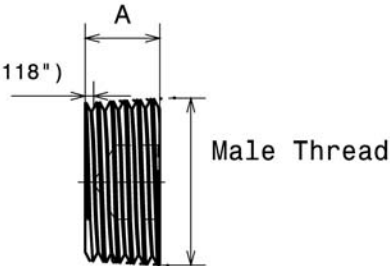

## Approvals & Specifications

ATEX/IEC Exd IIC Gb / Ex tb IIIC Db IP6X  
EN/IEC 60079-0, EN/IEC 60079-1, EN/IEC 60079-31  
ATEX/94/9/EC  $\text{Ex II 2GD}$

NEC/CEC Class I, Division 1, Groups ABCD  
Class II, Division 1, Groups EFG, Class III  
(>M50 Groups CD only)  
UL1203, UL514B, UL50  
C22.2 Nos. 30, 0.5, 0-M, 45, 18.3-04, 94-M91  
AExd IIC Class I, Zone 1  
E60079-0UL2279, UL60079-0, UL60079-1, UL60079-1-1  
E60079-1, E60079-1-1

Thread Gauging NPT: Male L1 +/-1 Turns

Material Nickel Plated Brass (-100 to + 150°C)

Ingress Protection With Thread Sealant (Non-Hardening)  
IP66/68 & NEMA 4X  
Without Thread Sealant IP54

Impact Resistance 7Nm

## Dimensions

Part Number	D5.1/2.N
Male Thread	1/2" NPT-14
Male Thread Length 'A'	0.551" (14.0mm)
Socket A/F	10mm