



DATA SHEET:

D5.1/2.S

Type 'D' Stopping Plugs are used to seal unused cable gland or conduit entries in Ex approved enclosures, maintaining the hazardous location certification and the overall integrity of the installation.



Type D5
NPT Taper

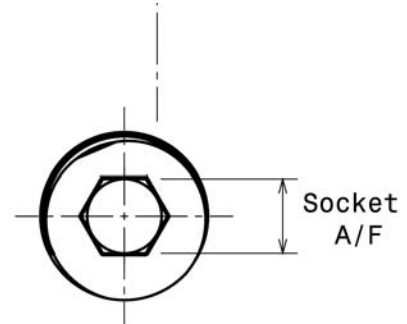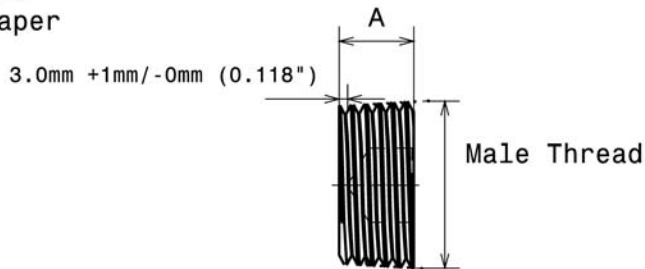

Approvals & Specifications

ATEX/IEC	Exd IIC Gb / Ex tb IIIC Db IP6X EN/IEC 60079-0, EN/IEC 60079-1, EN 60079-31 ATEX/94/9/EC
NEC/CEC	Class I, Division 1 Groups ABCD Class II, Groups EFG, Class III (>M50 Groups CD only) UL1203, UL514B, UL50 C22.2 Nos. 30, 0.5, 0-M, 45, 18.3-04, 94-M91 AExd IIC Class I, Zone 1 E60079-0UL2279, UL60079-0, UL60079-1, UL60079-1-1 E60079-1, E60079-1-1
Thread Gauging	NPT: Male L1 +/-1 Turns
Material	316 Stainless Steel 'S' (-100 to +850 °C) Passivated
Ingress Protection	With Thread Sealant (Non-Hardening) IP66/68 & NEMA 4X
Impact Resistance	7Nm

Dimensions	
Part Number	D5.1/2.S
Male Thread	1/2" NPT-14
Male Thread Length 'A'	0.551" (14.0mm)
Socket A/F	10mm