


DATA SHEET:

D5.3/4.N

TYPE 'D' STOPPING PLUGS ARE USED TO SEAL UNUSED CABLE GLAND OR CONDUIT ENTRIES IN EX APPROVED ENCLOSURES, MAINTAINING THE HAZARDOUS LOCATION CERTIFICATION AND



Type D5
NPT Taper

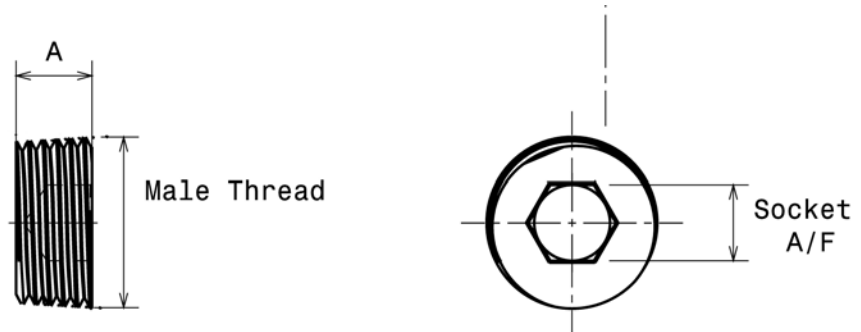

Approvals & Specifications

- ATEX** Exd IIC Gb / Ex tb IIIC Db IP6X
IECEX EN/IEC 60079-0, EN/IEC 60079-1, EN/IEC 60079-31
ATEX/94/9/EC
- NEC/CEC** **Class I, Division 1 Groups ABCD**
Class II, EFG, Class III
(>M50 Groups CD only)
UL1203, UL514B, UL50
C22.2 Nos. 30, 0.5, 0-M, 45, 18.3-04, 94-M91
AExd IIC Class I, Zone 1
E60079-0UL2279, UL60079-0, UL60079-1, UL60079-1-1
E60079-1, E60079-1-1
- Thread Gauging** NPT: Male L1 +/-1 Turns
- Material** Nickel Plated Brass 'N' (-100 to + 150C)
- Ingress Protection** With Thread Sealant (Non-Hardening)
IP66/68 & NEMA 4X
- Impact Resistance** 7Nm

Dimensions	
Part Number	D5.3/4.N
Male Thread	3/4" NPT-14
Male Thread Length 'A'	0.551" (14.0mm)
Socket A/F	10mm