


DATA SHEET:

D5.3/4.S

Type 'D' Stopping Plugs are used to seal unused cable gland or conduit entries in Ex approved enclosures, maintaining the hazardous location certification and the overall integrity of the installation.



Type D5
NPT Taper

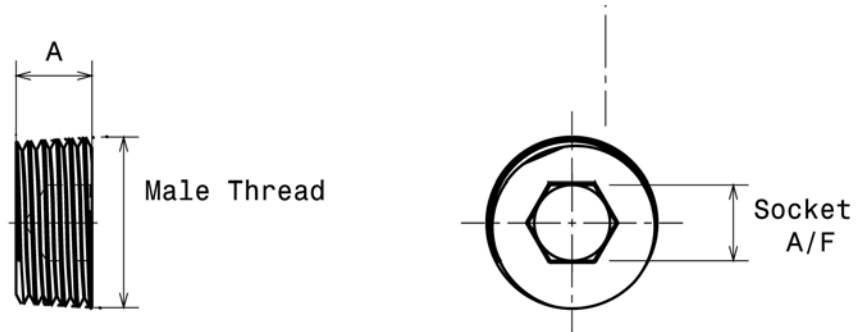

Approvals & Specifications

- ATEX** Exd IIC Gb / Ex tb IIIC Db IP6X
IECEX EN/IEC 60079-0, EN/IEC 60079-1, EN/IEC 60079-31
ATEX 94/9/EC
- NEC/CEC** **Class I, Division 1 Groups ABCD**
Class II, EFG, Class III
(>M50 Groups CD only)
UL1203, UL514B, UL50
C22.2 Nos. 30, 0.5, 0-M, 45, 18.3-04, 94-M91
AExd IIC Class I, Zone 1
E60079-0UL2279, UL60079-0, UL60079-1, UL60079-1-1
E60079-1, E60079-1-1
- Thread Gauging** NPT: Male L1 +/-1 Turns
- Material** 316 Stainless Steel 'S' (-100 to +850°C)
- Ingress Protection** With Thread Sealant (Non-Hardening)
IP66/68 & NEMA 4X
- Impact Resistance** 7Nm

Dimensions	
Part Number	D5.3/4.S
Male Thread	3/4" NPT-14
Male Thread Length 'A'	0.551" (14.0mm)
Socket A/F	10mm